



Nokia 3410 Teardown

Written By: Bryan





TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
 - [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Nokia 3410 Teardown



- Remove battery cover, battery and SIM Card.

Step 2




- Remove the front cover with a small flathead screwdriver or case opener.

Step 3




- Remove these screws.

Step 4

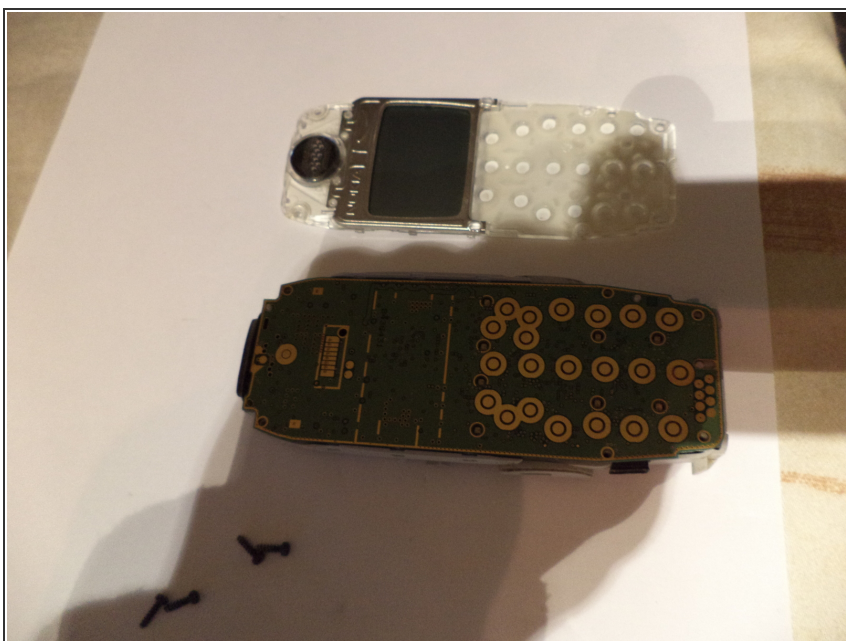


- Now you can pull this part off.

Step 5

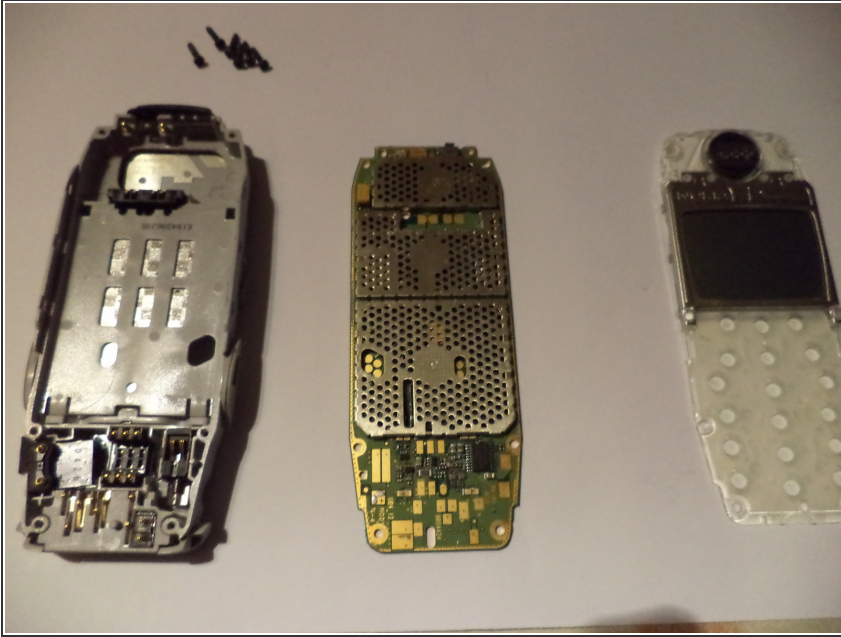

- Now you can pull off the PCB.

Step 6

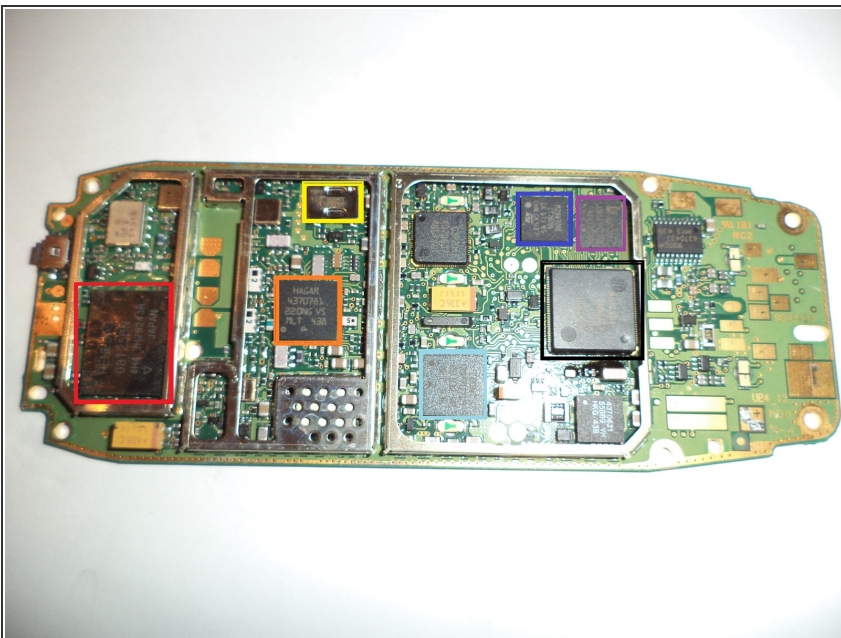

- To see the IC's on the PCB, we remove the EMI Shields with a small flathead screwdriver.
- Renesas 08125BN Power Amplifier
- HAGAR 4370781 Signaling Processor
- Kyocera KEU27260
- CCONT NMP70719 Power Management IC
- ST M28W320ECT Flash Memory
- EMLSI EM641FU16E CMOS Static RAM
- Texas Instruments MAD2WDI C GSM Baseband Processor

Step 7



- Finished!

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 07:02:32 AM.